

15W1600

Professional Low Frequency Driver



KEY FEATURES

- 4" Voice coil
- 800 Watts continuous power handling
- 97 dB Sensitivity
- Side Vent Voice Coil Cooling

GENERAL SPECIFICATIONS



Nominal Diameter	15" (381 mm)
Nominal impedance	8 ohms
Rated Power Handling	800 Watts
Program Power	1,600 Watts
Sensitivity 2.83V at 1m	97 dB
Recommended Hi Pass Crossover*	75 Hz*
<small>*For Full Power Handling</small>	<small>*12db Per Octave Crossover</small>
Frequency Response at -10dB	55 - 2,500 Hz
Voice Coil Diameter	4" (101 mm)
Voice Coil Wire	Cooper
Former Material	Kapton®
Frame Material	Die Cast Aluminum

THIELE-SMALL PARAMETERS


Equivalent Volume	Vas	91.19 l
Excursion	Xmax	7.6 mm
Free Air Resonance	Fs	53.6 Hz
Mechanical Factor	Qms	13.77
Electrical Factor	Qes	0.44
Total Factor	Qts	0.42
Cone Area	Sd	984 cm ²
Mechanical Mass	Mms	130.8 g
Bl Factor	BL	24.13 Tm
Dc Resistance	Re	5.8 Ohms
Inductance	Le	1.78 mH at 1 kHz
Mechanical Mass Without Air	Mmd	113.3 g
Mechanical Compliance	Cms	0.067 mm/N

EXTRA INFO

Overall Diameter	15.27" (388 mm)
Front Mount Baffle Cutout	14.05" (357 mm)
Mounting Depth	5.51" (140 mm)
Overall Depth	5.98" (152 mm)
Net Weight	24.71 Lbs (11.20 kg)
Shipping Weight	27.17 Lbs (12.32 kg)
Carton Dimensions W x L x H	16.14" x 16.14" x 7.48" (410 x 410 x 190 mm)

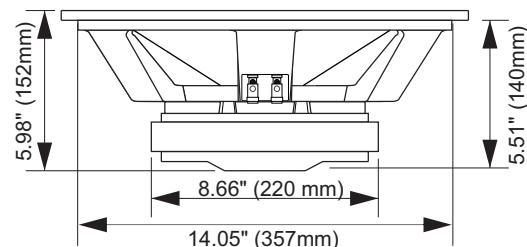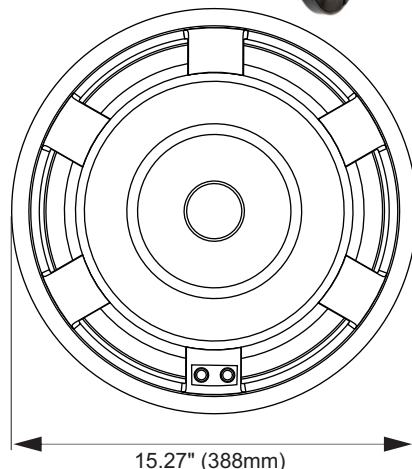

Frequency Response Measured at 2.83v/1m

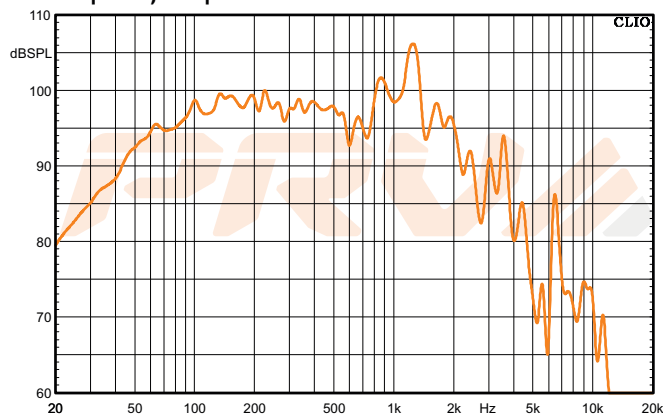

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 FORT LAUDERDALE, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br