

D4400Ph-Nd v2

Professional Compression Driver

PRV
audio
BRAZIL

KEY FEATURES



- 4" Voice coil and 2" exit
- 400 Watts continuos program power
- 109 dB Sensitivity
- Phenolic diaphragm

| | |
|------------------------------------|------------------------|
| Exit Throat Diameter | 2" (50 mm) |
| Nominal Impedance | 8 Ohm |
| Nominal Power Handling | 200 Watts |
| Continuous Program Power (RMS) | 400 Watts |
| Peak Power | 800 Watts |
| Sensitivity 2.83V at 1m* | 109 dB |
| Recommended High Pass Crossover** | 700 Hz*** |
| **for Full Power Handling | ***12 db/oct Crossover |
| Frequency Response at -10dB | 450 - 7,500Hz |
| Voice Coil Diameter | 4" (101.6 mm) |
| Voice Coil Wire | CCAW |
| Voice Coil Former Material | Kapton® |
| Diaphragm Material | Phenolic |
| Flux Density | 1.95 T |
| Magnet Material | Neodymium |


GENERAL SPECIFICATIONS

EXTRA INFO


| | |
|-----------------------------|---|
| Overall Diameter | 6.10" (155 mm) |
| Overall Depth | 3.25" (82.5 mm) |
| Mounting Bolt Circle | M6 x 4 4" (102 mm) |
| Net Weight | 8.81 lbs (4.0 kg) |
| Shipping Weight | 9.25 lbs (4.2 kg) |
| Carton Dimensions W x L x H | 6.5" x 6.5" x 4.72" (165 x 165 x 120 mm) |

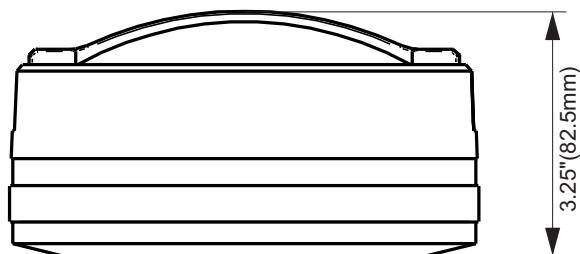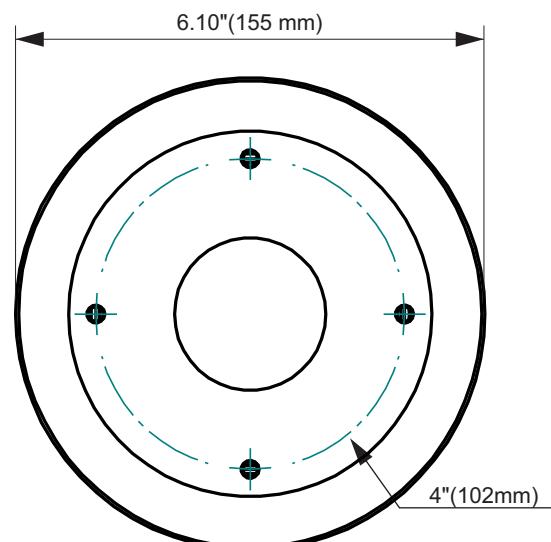

Impedance Curve - Free Air

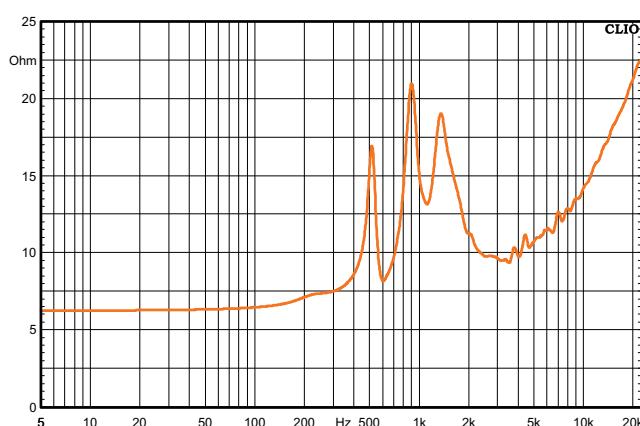

Frequency Response Measured at 2.83V/1m

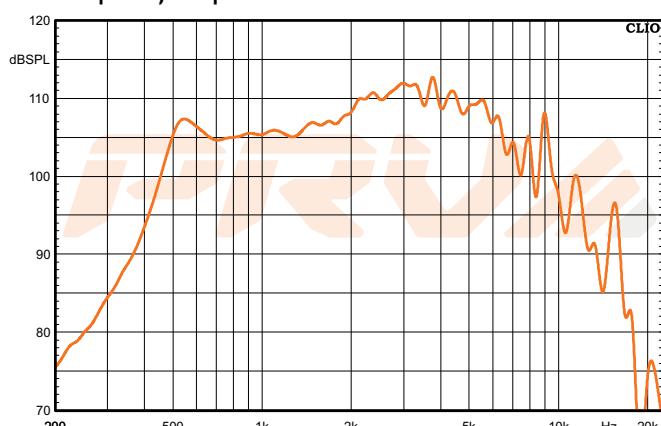

*Frequency Response and Impedance curves Measured on WG14-50CR

PRV AUDIO USA (USA and Export)
POMPANO BEACH, FL
support@prvaudio.com
www.prvaudio.com