


D3220TI-Nd-16

Professional Compression Driver




KEY FEATURES

- 3" Voice coil and 1.4" exit
- 110 Watts continuous power handling
- 109dB Sensitivity
- High grade Titanium Diaphragm
- Light Weight Neodymium Magnet

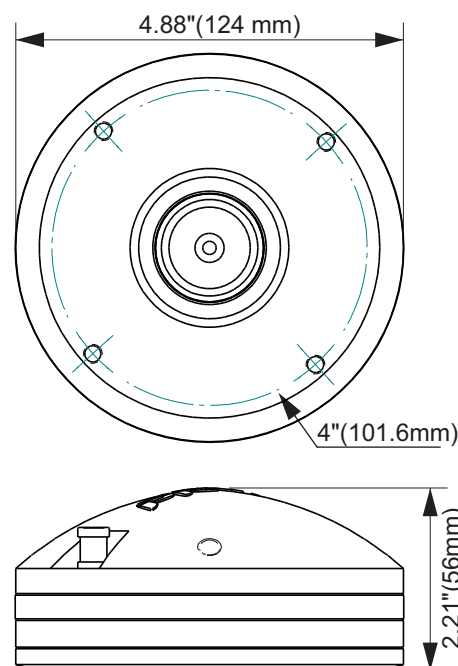

Frequency Response Measured at 4.00 V/1m

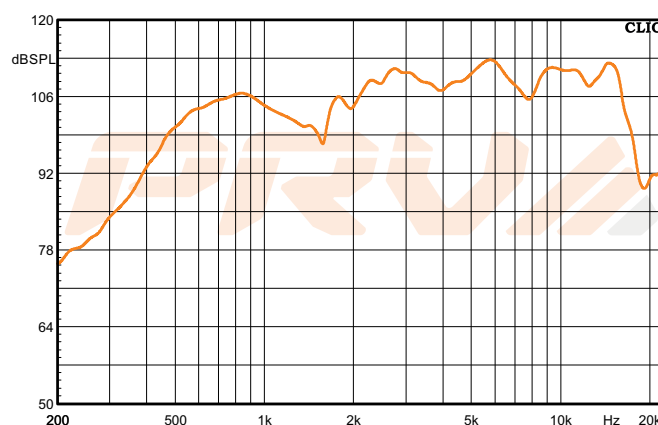

*Frequency Response Measured on WG500

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
FORT LAUDERDALE, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br

GENERAL SPECIFICATIONS

Exit Throat Diameter	1.4" (35.5 mm)
Nominal Impedance	16 Ohms
Rated Power Handling	110 Watts
Program Power	220 Watts
Sensitivity 4.0V at 1m*	109 dB
Recommended High Pass Crossover**	1600 Hz***
for Full Power Handling	*12 db/oct Crossover
Frequency Response at -10dB	1,600-17,000Hz
Voice Coil Diameter	3" (76.2 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.80 T
Magnet Material	Neodimium

EXTRA INFO

Overall Diameter	4.88" (124 mm)
Overall Depth	2.21" (56 mm)
Mounting Bolt Circle	M6x4 4" (101.6 mm)
Net Weight	4.81 lbs (2.18 kg)
Shipping Weight	5.36 lbs (2.43 kg)
Carton Dimensions W x L x H	5.70" x 5.70" x 3.15" (145 x 145 x 80 mm)