



# D230TI-S

Professional Compression Driver



## KEY FEATURES

- 1.4" Voice coil
- 30 Watts continuous power handling
- 105 dB Sensitivity
- High grade Titanium Diaphragm

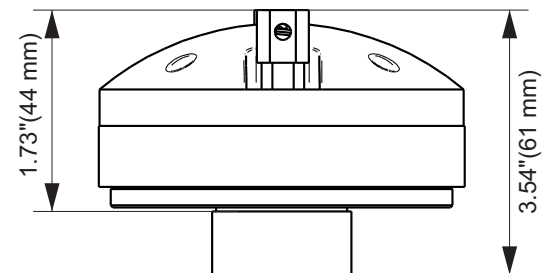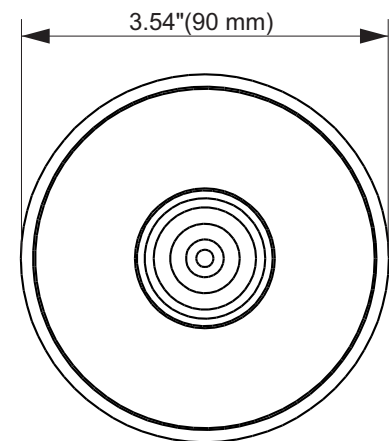


## GENERAL SPECIFICATIONS

Exit Throat Diameter	1" (25.4mm)
Nominal Impedance	8 Ohms
<b>Rated Power Handling</b>	<b>30 Watts</b>
Program Power	60 Watts
<b>Sensitivity 2.83V at 1m*</b>	<b>105 dB</b>
Recommended High Pass Crossover**	2000 Hz***
**for Full Power Handling	***12db/oct Crossover
<b>Frequency Response at -10dB</b>	<b>1,800-20,000Hz</b>
Voice Coil Diameter	1.4"(35.5 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite

## EXTRA INFO

Overall Diameter	3.54" (90 mm)
Overall Depth	2.40" (61 mm)
Mounting Thread	1 3/8" 18 TPI
Net Weight	2.05 lbs (0.93 kg)
Shipping Weight	2.14 lbs (0.97 kg)
Carton Dimensions W x L x H	3.74" x 3.74" x 2.95" (95 x 95 x 75 mm)

Frequency Response Measured at 2.83v/1m

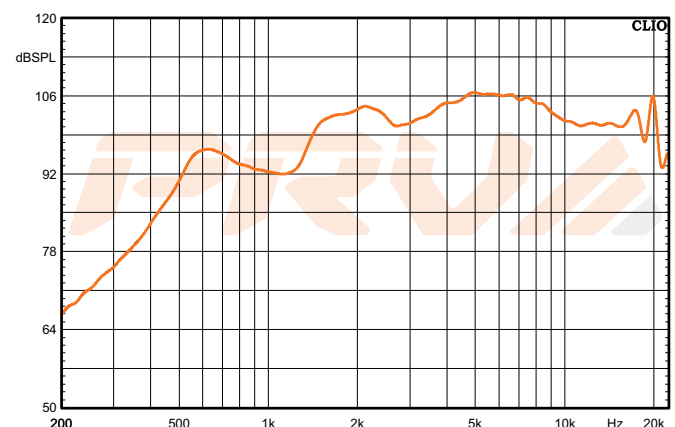

\*Frequency Response Measured on WG11-25

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)  
FORT LAUDERDALE, FL SAO LEOPOLDO, RS  
support@prvaudio.com vendas@pvaudio.com.br  
www.prvaudio.com www.pvaudio.com.br