

# TW400Ti-Nd

Professional Super Tweeter




## KEY FEATURES

- 1.0" Voice coil
- 60 Watts continuous power handling
- 106 dB Sensitivity
- Neodymium Magnet
- Titanium Diaphragm




Nominal Impedance	4 Ohms
<b>Rated Power Handling</b>	<b>60 Watts</b>
Program Power	120 Watts
<b>Sensitivity 2.00V at 1m*</b>	<b>106 dB</b>
Recommended High Pass Crossover**	6000 Hz***
<small>**for Full Power Handling</small>	<small>***12db/oct Crossover</small>
<b>Frequency Response at -10dB</b>	<b>4,500-20,000Hz</b>
Voice Coil Diameter	1.0"(25.4 mm)
Voice Coil Wire	Aluminum
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.45 T
Magnet Material	Neodymium

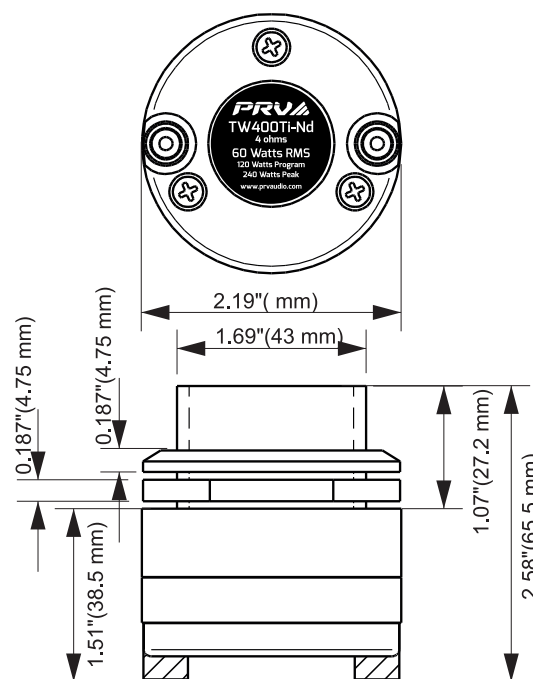

Overall depth	2.58" (65.5 mm)
Mounting Depth	1.51" (38.5 mm)
Overall Diameter	2.19" (55.7 mm)
Cutout Diameter	1.69" (43 mm)
Net Weight	1.10 lbs (0.50 kg)
Shipping Weight	1.21 lbs (0.55 kg)
Carton Dimensions W x L x H	3.38" x 3.38" x 3.74" (86 x 86 x 95 mm)

Frequency Response Measured at 2.00V/1m

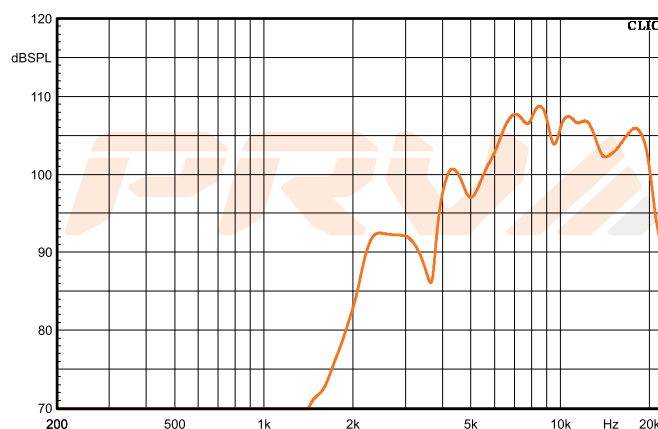

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)  
FORT LAUDERDALE, FL SAO LEOPOLDO, RS  
support@prvaudio.com vendas@pvaudio.com.br  
www.prvaudio.com www.pvaudio.com.br