



WG230Ti

Professional Compression Driver




KEY FEATURES

- 1.4" Voice coil
- 30 Watts continuous power handling
- 105 dB Sensitivity
- WG11-25 Wave Guide

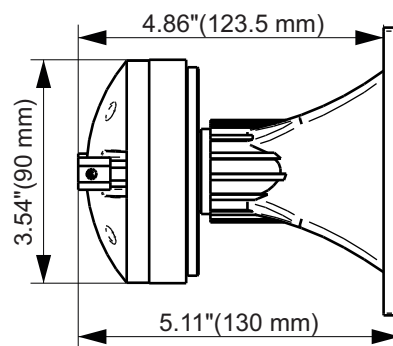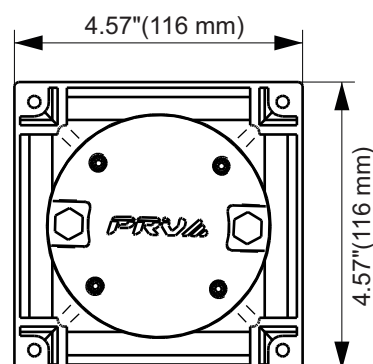

Frequency Response Measured at 2.83v/1m

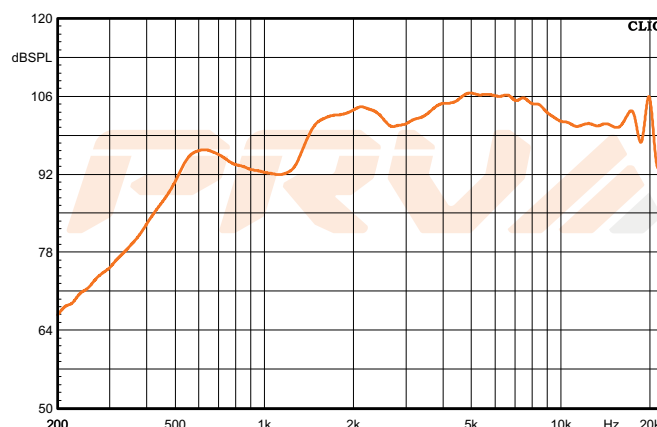

GENERAL SPECIFICATIONS

Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohms
Rated Power Handling	30 Watts
Program Power	60 Watts
Sensitivity 2.83V at 1m*	105 dB
Recommended High Pass Crossover**	2000 Hz***
for Full Power Handling	*12 db/oct Crossover
Frequency Response at -10dB	1800-20,000Hz
Voice Coil Diameter	1.4"(35.5 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite

EXTRA INFO

Overall Depth	5.11" (130 mm)
Mounting Depth	4.86" (123.5 mm)
Overall Width	4.57" (116 mm)
Overall Height	4.57" (116 mm)
Baffle Cutout	4.16" (102 mm)
Net Weight	4.86 lbs (1.00 kg)
Shipping Weight	2.41 lbs (1.10 kg)
Carton Dimensions W x L x H	4.64" x 4.64" x 5.31" (118 x 118 x 135 mm)

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 FORT LAUDERDALE, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br