


TW100SD-4

Professional Super Tweeter



KEY FEATURES

- 1.0" Voice coil
- 50 Watts continuous power handling
- 92 dB Sensitivity
- Soft dome diaphragm

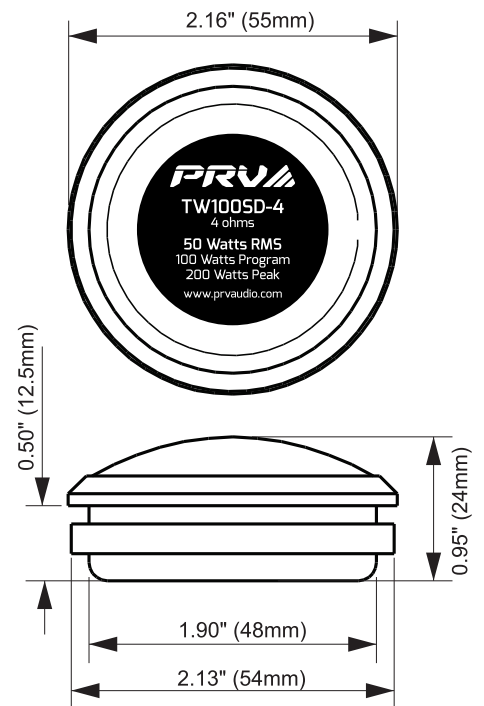


GENERAL SPECIFICATIONS

Nominal Impedance	4 Ohms
Rated Power Handling	50 Watts
Program Power	100 Watts
Sensitivity 2.00V at 1m*	92 dB
Recommended High Pass Crossover**	3500 Hz***
for Full Power Handling	*12db/oct Crossover
Frequency Response at -10dB	2,000-20,000Hz
Voice Coil Diameter	1.0" (25 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Silk
Magnet Material	Neodymium

EXTRA INFO

Overall depth	0.95" (24 mm)
Mounting Depth	0.50" (12.5 mm)
Overall Diameter	2.16" (55 mm)
Cutout Diameter	1.90" (48 mm)
Net Weight	0.55 lbs (0.25 kg)
Shipping Weight (pair)	1.32 lbs (0.6 kg)
Carton Dimensions W x L x H	5.51" x 2.68" x 2.76" (140 x 68 x 70 mm)

Frequency Response Measured at 2.00V/1m

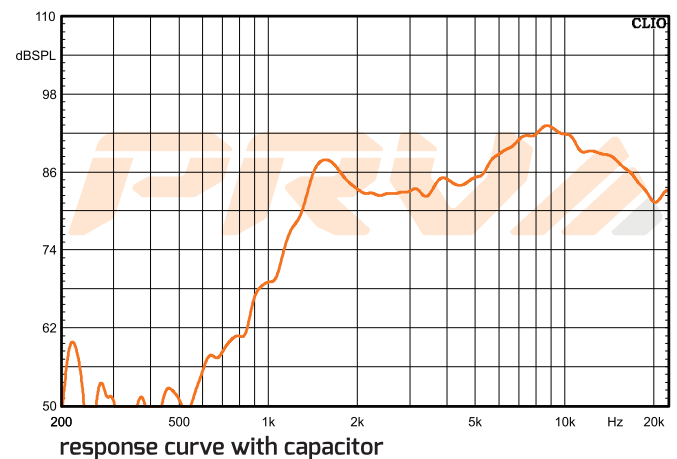

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
POMPANO BEACH, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br