



WG2500Py SLIM

Professional Compression Driver



KEY FEATURES

- 2.5" Voice coil and 2" exit
- 100 Watts nominal power handling
- 107 dB Sensitivity
- WGP14-50X SLIM waveguide

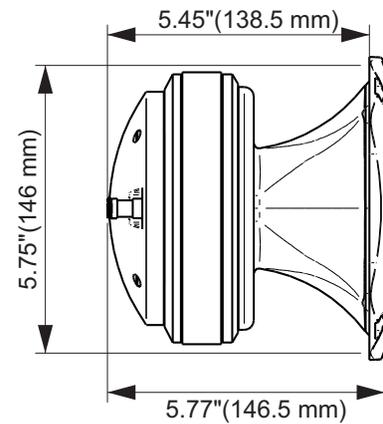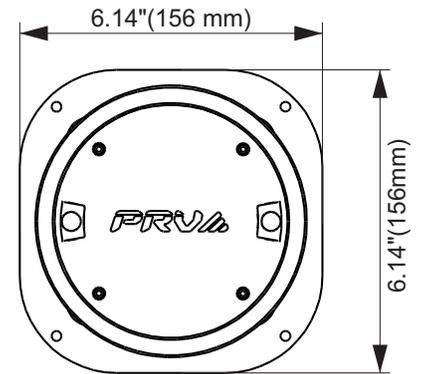


GENERAL SPECIFICATIONS

Exit Throat Diameter	2" (50 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	100 Watts
Continuous Program Power (RMS)	200 Watts
Peak Power	400 Watts
Sensitivity 2.83V at 1m*	107 dB
Recommended High Pass Crossover**	900 Hz***
for Full Power Handling	*12 db/oct Crossover
Frequency Response at -10dB	800-17,000Hz
Voice Coil Diameter	2.5" (63.5 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Polyimide
Flux Density	1.87 T
Magnet Material	Ferrite

EXTRA INFO

Overall Depth	5.77" (146.5mm)
Mounting Depth	5.45" (138.5 mm)
Overall Width	6.14" (156 mm)
Overall Height	6.14" (156 mm)
Baffle Cutout	5.75" (146 mm)
Net Weight	7.72 lb (3.50 kg)
Shipping Weight	8.38lb (3.80 kg)
Carton Dimensions W x L x H	6.50" x 6.70" x 7.10"
	(165 x 170 x 180 mm)

Impedance Curve - Free Air

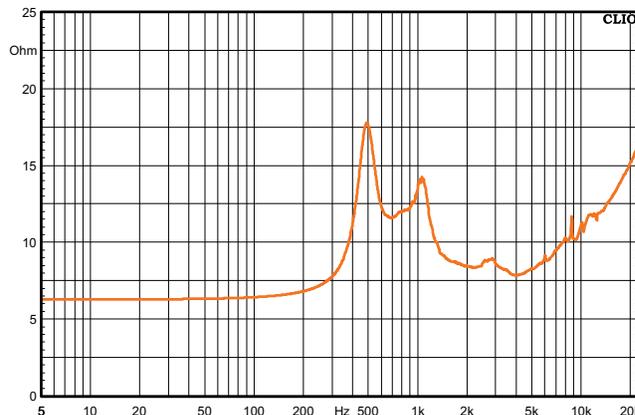

Frequency Response Measured at 2.83V/1m



PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 POMPANO BEACH, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br