

TW350Ti-4 SLIM



Professional Super Tweeter



KEY FEATURES

- 1.0" Voice coil
- 60 Watts nominal power handling
- 104 dB Sensitivity
- Titanium Diaphragm

Nominal Impedance	4 Ohm
Nominal Power Handling	60 Watts
Continuous Program Power(RMS)	120 Watts
Max Peak Power	240 Watts
Sensitivity 2.00V at 1m*	104 dB
Recommended High Pass Crossover**	5000 Hz***
<small>**for Full Power Handling</small>	<small>***12db/oct Crossover</small>
Frequency Response at -10dB	4,500-20,000Hz
Voice Coil Diameter	1.0" (25 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.45 T
Magnet Material	Ferrite

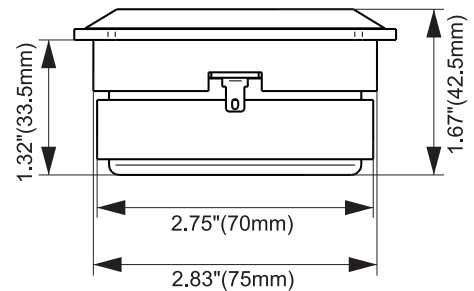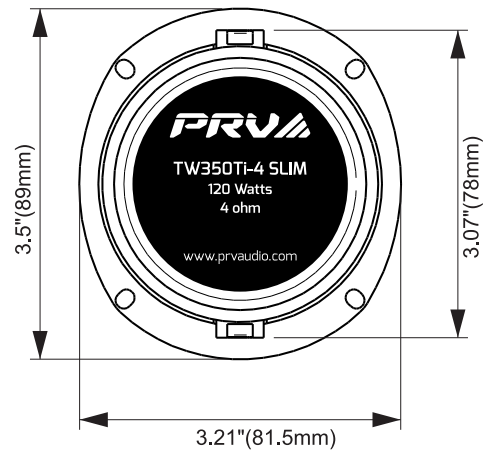


GENERAL SPECIFICATIONS


EXTRA INFO

Overall depth	1.67" (42.5 mm)
Mounting Depth	1.32" (33.5 mm)
Overall Width	3.21" (81.5 mm)
Overall Height	3.50" (89 mm)
Cutout Diameter + Terminals	2.83" (75 mm)
Net Weight	1.37 lbs (0.62 kg)
Shipping Weight	1.47 lbs (0.67 kg)
Carton Dimensions W x L x H	3.75" x 7.10" x 2.00" (95 x 180 x 50 mm)

Impedance Curve - Free Air

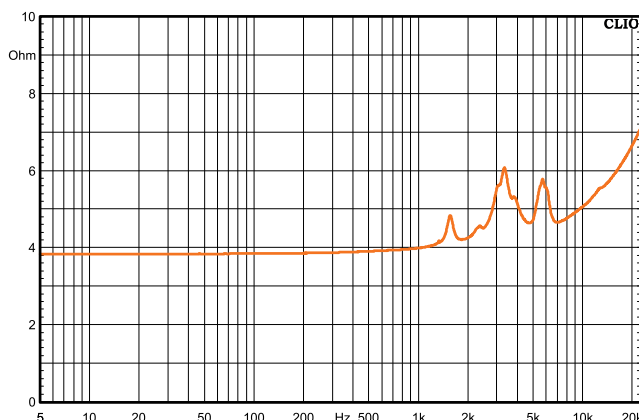

Frequency Response Measured at 2.00V/1m

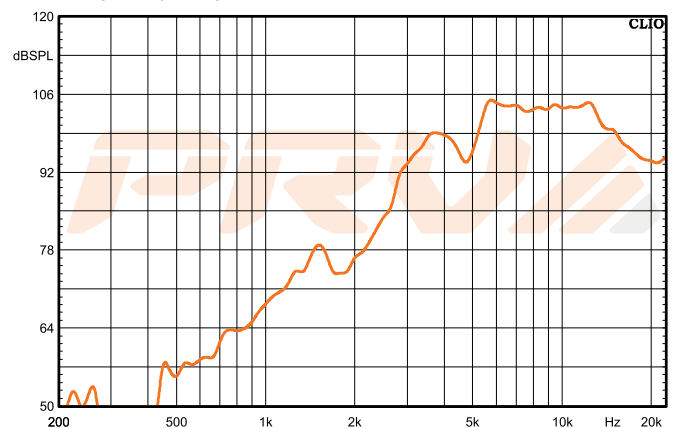

PRV AUDIO USA (USA and Export) FORT LAUDERDALE, FL support@prvaudio.com www.prvaudio.com
 PRV AUDIO BRAZIL (Brazilian Sales Only) SAO LEOPOLDO, RS vendas@pvaudio.com.br www.pvaudio.com.br