

# TW350Ti-4

Professional Super Tweeter

**PRV**  
audio  
BRAZIL

## KEY FEATURES

- 1.0" Voice coil
- 120 Watts Continuous Program Power
- 105 dB Sensitivity
- Titanium Diaphragm

Nominal Impedance 4 Ohm

**Nominal Power Handling 60 Watts**

Continuous Program Power(RMS) 120 Watts

Max Peak Power 240 Watts

**Sensitivity 2.00V at 1m\*** 105 dB

Recommended High Pass Crossover\*\* 5000 Hz\*\*\*  
\*\*for Full Power Handling \*\*\*12db/oct Crossover

**Frequency Response at -10dB** 4,500-20,000Hz

Voice Coil Diameter 1.0" (25 mm)



Voice Coil Wire CCAW

Voice Coil Former Material Kapton®

Diaphragm Material Titanium

Flux Density 1.30 T

Magnet Material Ferrite

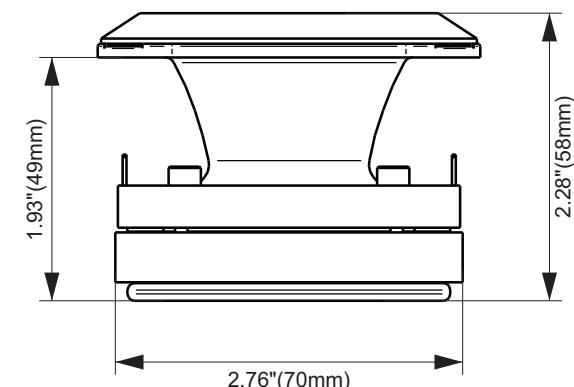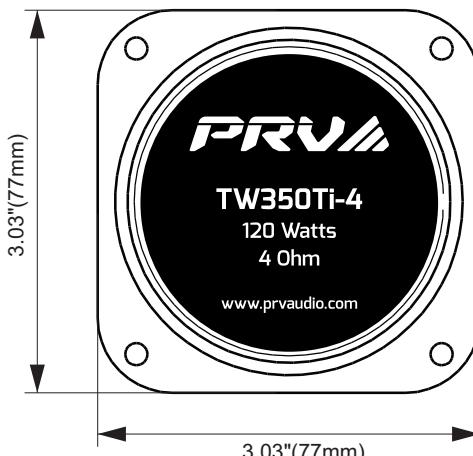

Overall Depth 2.28" (58 mm)

Mounting Depth 1.93" (49 mm)

Overall Width 3.03" (77 mm)

Overall Height 3.03" (77 mm)


Cutout Diameter 2.76" (70 mm)

Net Weight 1.0 lbs (0.45 kg)


Shipping Weight (pair) 2.55 lbs (1.1 kg)

Carton Dimensions W x L x H 6.89" x 3.35" x 2.75"  
(175 x 85 x 70 mm)

## Impedance Curve - Free Air

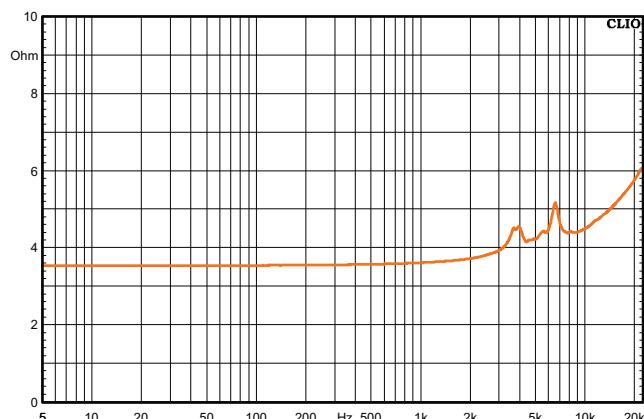

## Frequency Response Measured at 2.00V/1m

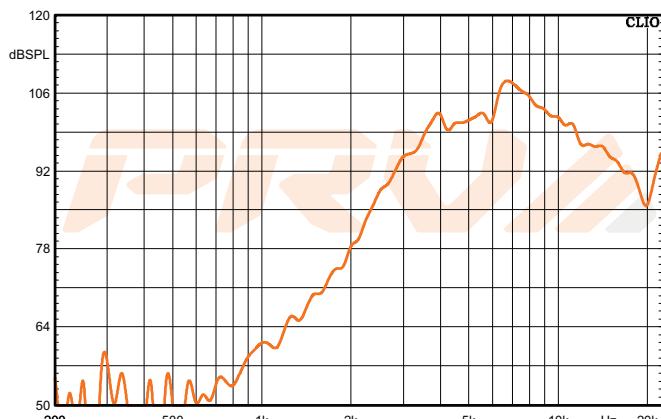

PRV AUDIO USA (USA and Export)  
FORT LAUDERDALE, FL  
support@prvaudio.com  
www.prvaudio.com