

8MR600X-4

Professional Mid Range Driver



KEY FEATURES

- 2" Voice coil
- 600 Watts continuous program power
- 98 dB Sensitivity
- 85 - 8,500 Hz



GENERAL SPECIFICATIONS



Nominal Diameter	8" (203 mm)
Nominal impedance	4 Ohm
Nominal Power Handling	300 Watts
Continuous Program Power (RMS)	600 Watts
Max Peak Power	1200 Watts
Sensitivity 2.00V at 1m	98 dB
Recommended Hi Pass Crossover*	145 Hz*
<small>*For Full Power Handling</small>	<small>*12db Per Octave Crossover</small>
Frequency Response	85 - 8,500 Hz
Voice Coil Diameter	2" (51 mm)
Voice Coil Wire	CCA W
Voice Coil Winding Depth	14.2 mm
Former Material	Polyimide
Magnetic Gap Depth	8.0 mm
Frame Material	Die Cast Aluminum

THIELE-SMALL PARAMETERS


Equivalent Volume	Vas	19.65 l
Excursion (mathematical)***	Xmax	5.10 mm
Free Air Resonance	Fs	77.22 Hz
Mechanical Factor	Qms	6.71
Electrical Factor	Qes	0.36
Total Factor	Qts	0.34
Cone Area	Sd	241 cm ²
Mechanical Mass	Mms	17.46 g
Bl Factor	Bl	8.93 Tm
Dc Resistance	Re	3.4 Ohm
Inductance	Le	0.31 mH at 1 kHz
Mechanical Mass Without Air	Mmd	15.34 g
Mechanical Compliance	Cms	0.243 mm/N

EXTRA INFO


Overall Diameter	8.21" (208.5 mm)
Front Mount Baffle Cutout	7.29" (185.3 mm)
Mounting Depth	3.75" (95.5 mm)
Overall Depth	4.03" (102.5 mm)
Net Weight	7.04 Lbs (3.20 kg)
Shipping Weight	7.60 Lbs (3.45 kg)
Carton Dimensions W x L x H	8.85" x 8.85" x 4.92" (225 x 225 x 125 mm)

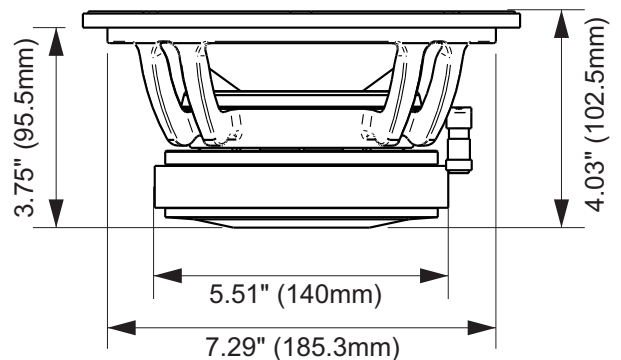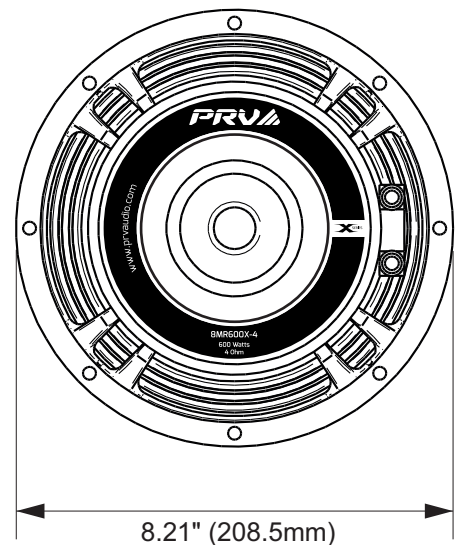

Impedance Curve - Free Air

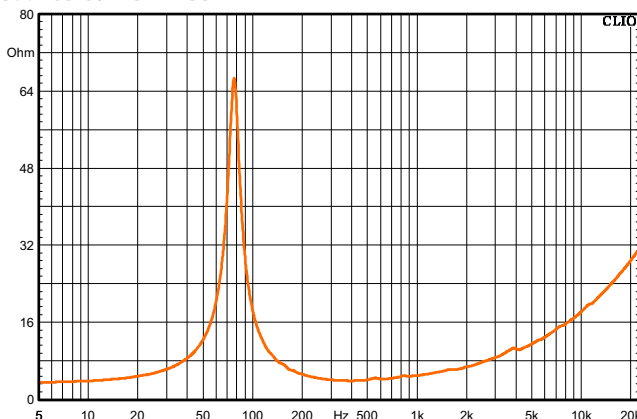

Frequency Response Measured at 2.00V/1m

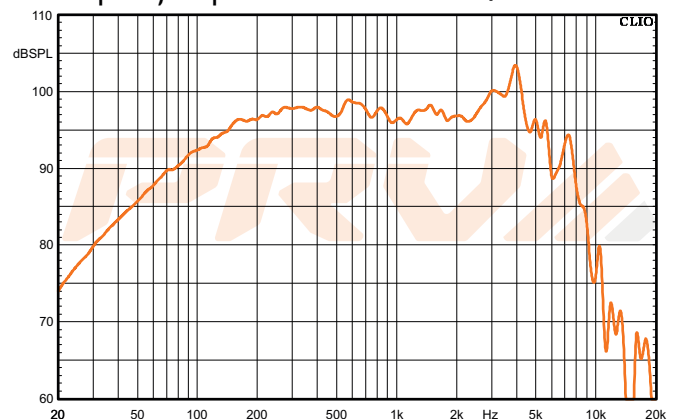

***Xmax=(Voice coil winding depth-Magnetic Gap depth)/2+ Magnetic Gap Depth/4

PRVA AUDIO USA (USA and Export)
POMPANO BEACH, FL
support@prvaudio.com
www.prvaudio.com