

# D250Ti-S

Professional Compression Driver





## KEY FEATURES


- 1.4" Voice coil and 1" exit
- 100 Watts continuous program power
- 106 dB Sensitivity
- High-grade Titanium diaphragm

Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
<b>Nominal Power Handling</b>	<b>50 Watts</b>
Continuous Program Power (RMS)	100 Watts
Peak Power	200 Watts
<b>Sensitivity 2.83V at 1m*</b>	<b>106 dB</b>
Recommended High Pass Crossover**	2000 Hz***
<small>**for Full Power Handling</small>	<small>***12 db/oct Crossover</small>
<b>Frequency Response at -10dB</b>	<b>1,800-20,000Hz</b>
Voice Coil Diameter	1.4" (35.5 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite


Overall Diameter	3.54" (90 mm)
Overall Depth	2.69" (68.3 mm)
Mounting Thread	1 3/8" 18TPI
Net Weight	2.05 lbs (0.93 kg)
Shipping Weight	2.20 lbs (1.00 kg)
Carton Dimensions W x L x H	3.74" x 3.74" x 3.35" (95 x 92 x 85 mm)

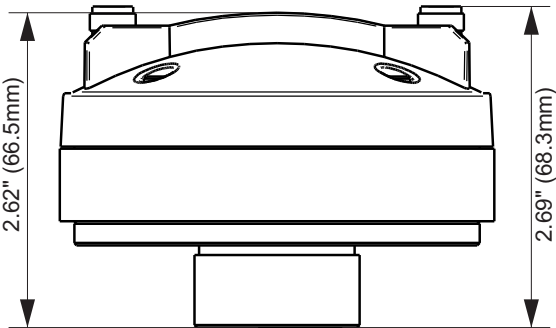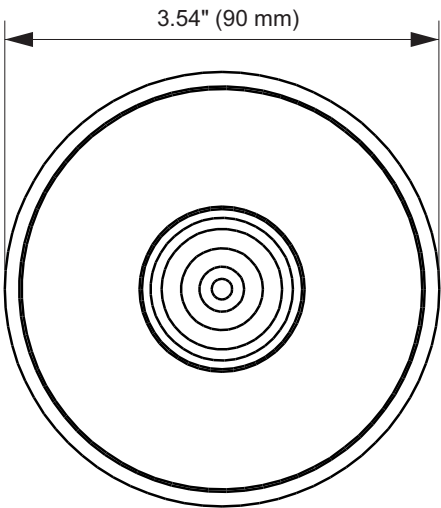

Impedance Curve - Free Air

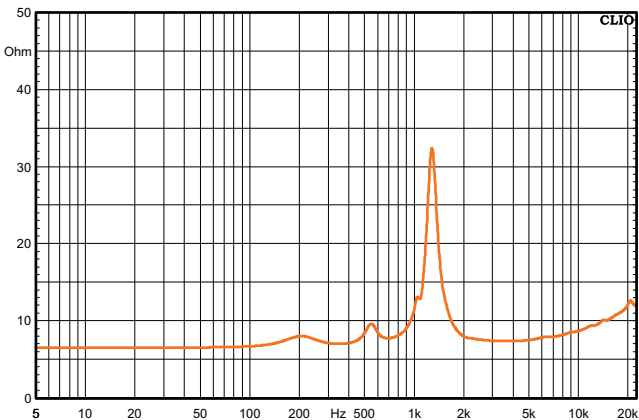

Frequency Response Measured at 2.83V/1m

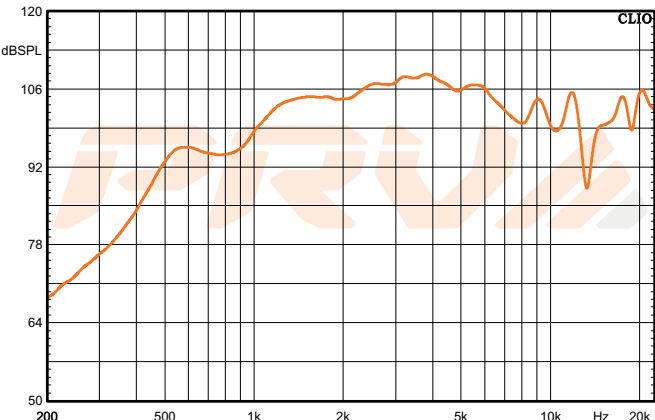

\*Frequency Response and Impedance curve Measured on WGP14-25S

PRV AUDIO USA (USA and Export)  
POMPAÑO BEACH, FL  
support@prvaudio.com  
www.prvaudio.com