

DT175Ph-S

Professional Compression Driver





KEY FEATURES


- 1" Voice coil and 1" exit
- 75 Watts nominal power handling
- 108 dB Sensitivity
- Phenolic Diaphragm
- 1,100-18,000Hz

Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	75 Watts
Continuous Program Power (RMS)	150Watts
Peak Power	300Watts
Sensitivity 2.83V at 1m*	108 dB
Recommended High Pass Crossover**	3000 Hz***
for Full Power Handling *12 db/oct Crossover	
Frequency Response at -10dB	1,100-18,000Hz
Voice Coil Diameter	1"(25.4 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Phenolic Resin
Flux Density	1.02 T
Magnet Material	Ferrite


Overall Diameter	3.30" (83.8 mm)
Overall Depth	2.44" (62 mm)
Mounting Thread	1 3/8" 18 TPI
Net Weight	1.67 lbs (0.76 kg)
Shipping Weight	1.80 lbs (0.82 kg)
Carton Dimensions W x L x H	4.21" x 3.50" x 2.83" (107 x 89 x 72 mm)

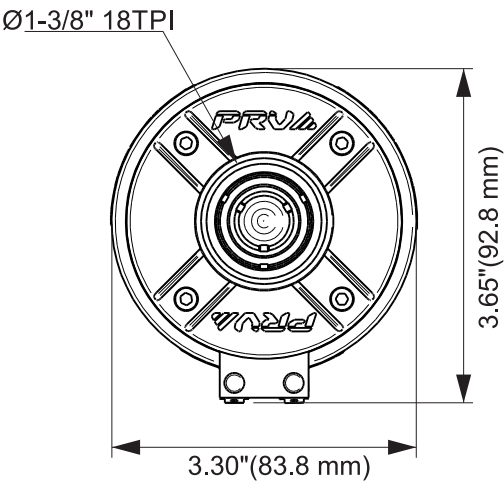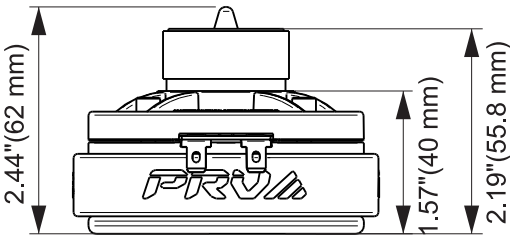

Impedance Curve - Free Air

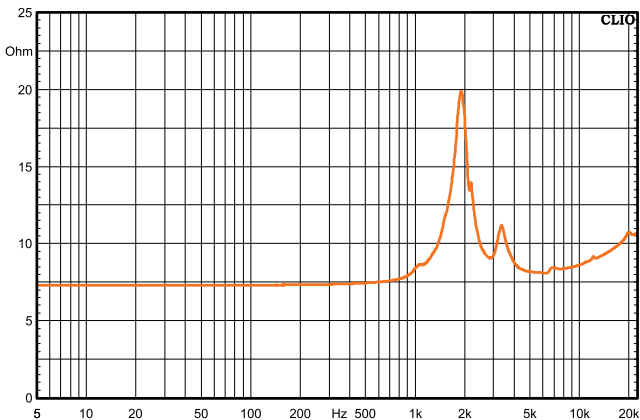

Frequency Response Measured at 2.83V/1m

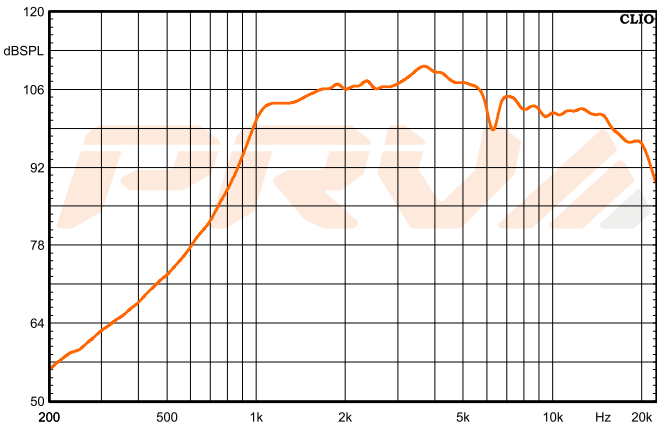

Impedance and Response curves measured with WG14-25-S

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
POMPANO BEACH, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br