

D4400Ti-Nd

Professional Compression Driver




KEY FEATURES


- 4" Voice coil and 2" exit
- 400 Watts continuos program power
- 110 dB Sensitivity
- High Grade Titanium diaphragm
- Light Weight Neodymium Magnet

Exit Throat Diameter	2" (50 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	200 Watts
Continuous Program Power (RMS)	400 Watts
Peak Power	800 Watts
Sensitivity 2.83V at 1m*	110 dB
Recommended High Pass Crossover**	1400 Hz***
for Full Power Handling*12 db/oct Crossover	
Frequency Response at -10dB	1300 - 19,000Hz
Voice Coil Diameter	4" (101.6 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.9 T
Magnet Material	Neodymium


Overall Diameter	6.06" (154 mm)
Overall Depth	2.48" (63 mm)
Mounting Bolt Circle	M6 x 4 4" (102 mm)
Net Weight	8.82 lbs (4.00 kg)
Shipping Weight	9.77 lbs (4.43 kg)
Carton Dimensions W x L x H	6.89" x 6.89" x 3.74" (175 x 175 x 95 mm)

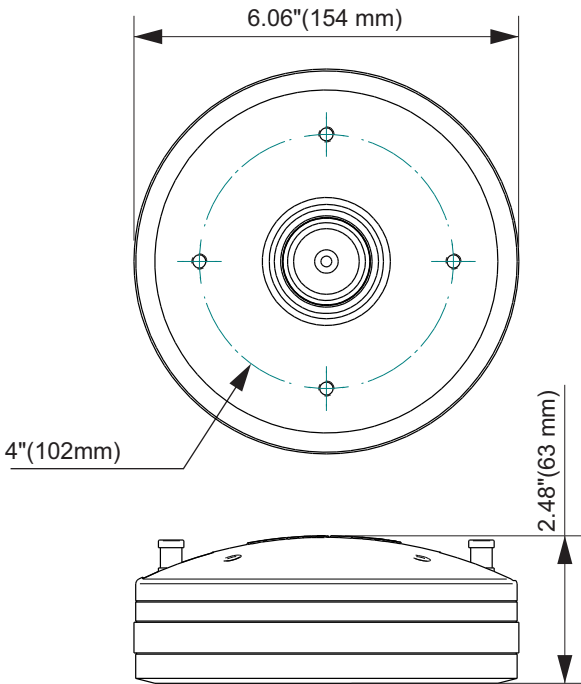

Impedance Curve - Free Air

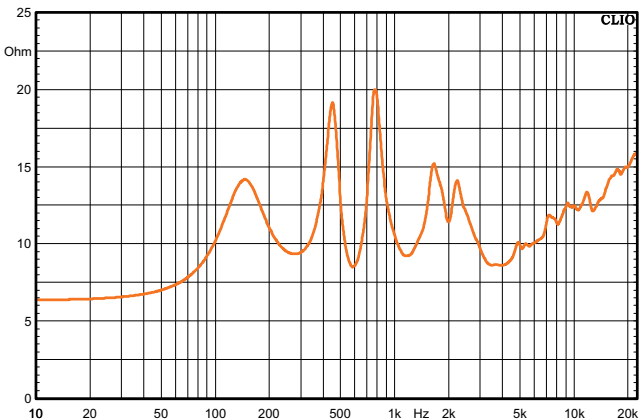

Frequency Response Measured at 2.83V/1m

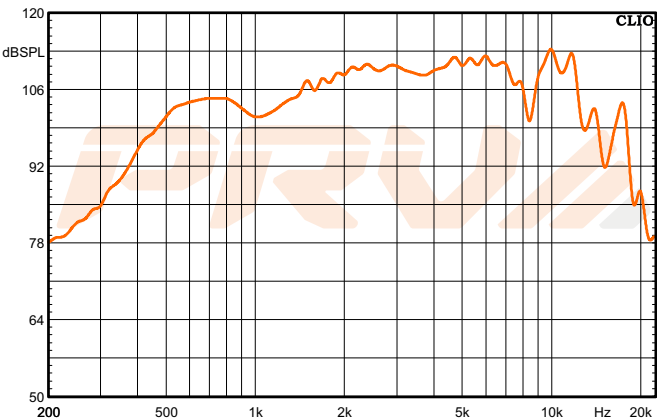

PRV AUDIO USA (USA and Export)
Fort Lauderdale, FL
support@prvaudio.com
www.prvaudio.com